







PRODUCT DESCRIPTION

BrightLine smart light box displays feature swift tool-free installation, durable light-weight frames, embedded LEDs, and exclusive One Planet recycled fabrics with impressive vivid graphics, all conveniently organized in a heavy-duty shipping case. Panel A1 features a bold, angled design that commands attention on its own, yet seemlessly elevates the impact when paired with other panels as a unique accent

Mix-and-match with other BrightLine panels, or combine with WaveLine and StraightLine displays, to create unique branded environments.

	really make brands stand out.
ı	Counters and other accessories complete an enhanced experience

DIMENSIONS		
Assembled Unit	60-70"w x 96"h x 4"d	
Packed Case	46.5"w x 15"h x 12"d, 55 lbs	
Shipping Box	47"w x 16"h x 13"d, 57 lbs	
Graphic Size	60-70"w x 96"h	

LED LIGHT SPECIFICATIONS		
Power Requirements	112 W	
CCT (Color Temp)	6000 K	
Voltage Input	110 / 220V	
Voltage Output	24V 11A 264W	
Transformers Included	1	

KEY FEATURES

- Easy tool free assembly
- Lightweight portable construction
- Magnetic power links
- LED lights encapsulated in frame
- Heavy duty shipping case, molded foam inserts
- Single- or double-sided
- Vibrant graphics on recycled fabric

DISPLAY CONSTRUCTION

Aluminum frame with aluminum support poles

GRAPHIC MATERIAL		
Graphic Print : Dye sublimated on One Planet, 100% recycled, backlit fabric	Bottles recycled 46	
Blocker : One Planet light block recycled fabric	Bottles recycled 20	

GRAPHIC FINISHING

Silicone sewn edges

WARRANTY


Limited Warranty Periods

- Frame: Lifetime - Lights: 90 days

- Graphics: 30 days



PARTS

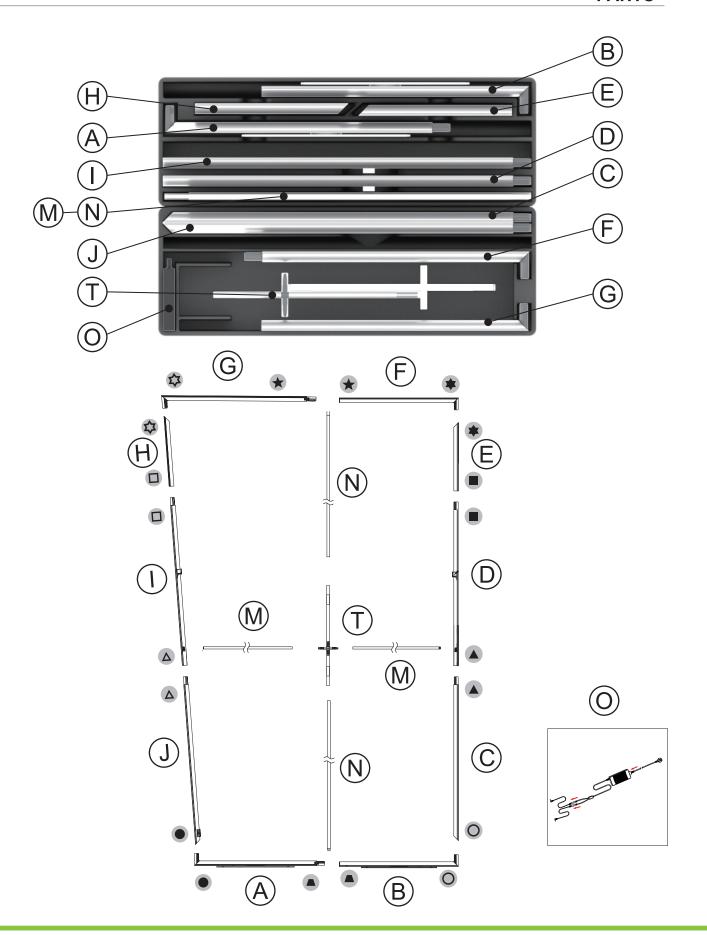




ASSEMBLY


Assemble parts on the floor and stand-up unit when completed.

(1)




2






3

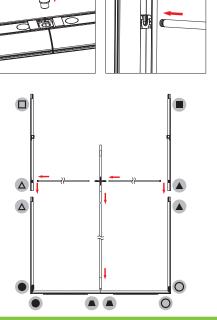


(4)



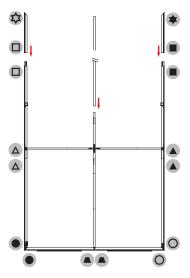


(5)



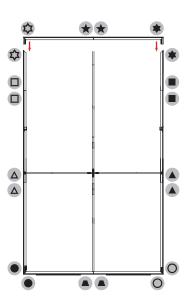





Push the silicone bead into each corner of the frame with your thumb.

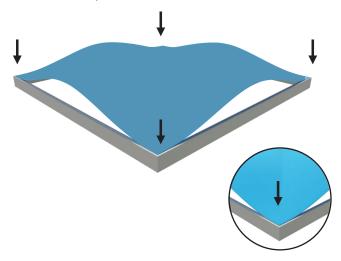

Push the siliconebead into the middle of the run and work your way around the perimeter of the frame until all beading is pushed in properly

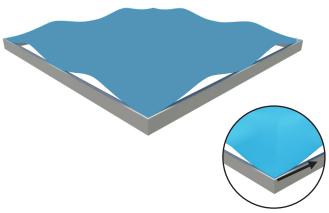

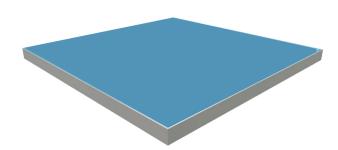



To Remove Graphic

Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter



