



# Waveline Orca C

WLM-ORCA-C

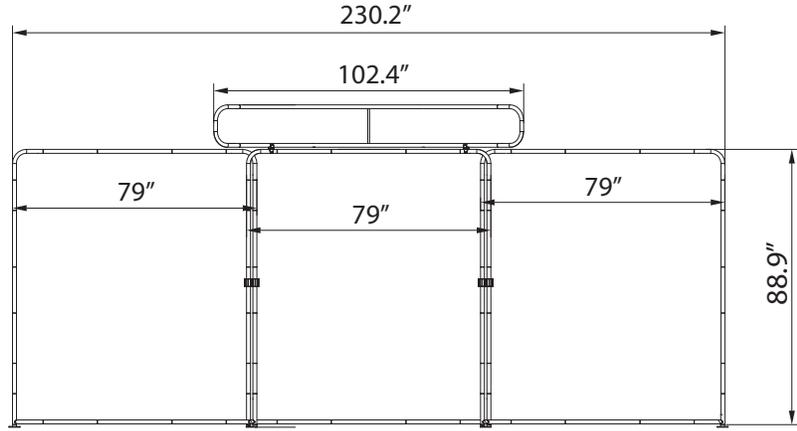

\*Shown with optional CA605 case & lighting



## PARTS INCLUDED

**Straight Poles:** (6)WLM#04  
(6)WLM#05  
(2)WLM#17  
(1)WLM#34



(4) Soft Bag

**Corner Poles:** (6)WLM#90  
(6)WLM#35  
(2)WLM#16



**Feet:**



(2) Single Edge Feet  
WLM#22E



(1) Double Left Feet With Necking  
WLM#22R



(1) Double Left Feet With Necking  
WLM#22L



**Clear Double C Clamps**  
(2)WLM#24L-CLEAR  
(2)WLM#24R-CLEAR



(2) Double U-Shaped Clamp  
WLM#27



(4) Fabric Graphics



## DISPLAY CONSTRUCTION

Aluminum frame with aluminum support feet

## LIMITED WARRANTY PERIODS

- Frame : Lifetime

## GRAPHIC MATERIAL & FINISHING


Top grade YKK zippers along bottom of display.  
Dye sublimated on One Planet, 100% recycled, fabric

Bottles recycled

**356**


## DIMENSIONS

Assembled Unit	232.5"w x 104.6"h
Graphic Size	(3) 79"w x 89"h (1) 102"w x 14"h
Shipping Box	(3) 36"w x 14"h x 14"d, 65 lbs total

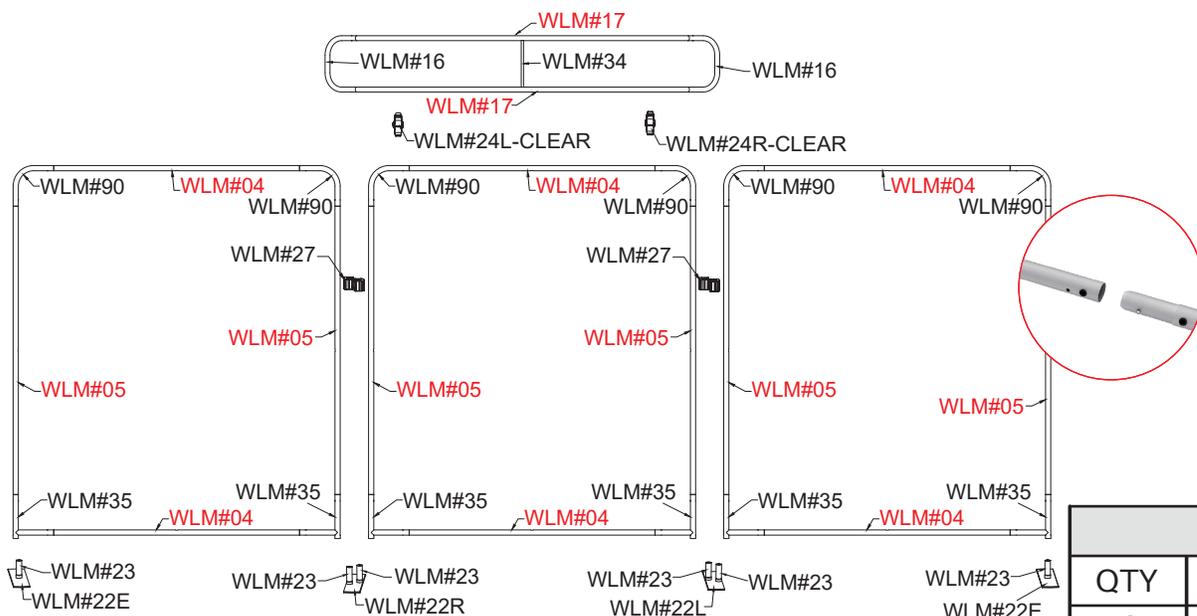


WLM-ORCA-C	
QTY	PART NUMBER
6	WLM#35
6	WLM#23
2	WLM#22E
1	WLM#22L
1	WLM#22R
2	WLM#27
2	WLM#24L-CLEAR
2	WLM#24R-CLEAR
6	WLM#04
6	WLM#05
6	WLM#90
2	WLM#17
2	WLM#16
1	WLM#34


① Lay out parts according to the assembly diagram and push the pipes together. Insert center support pole.

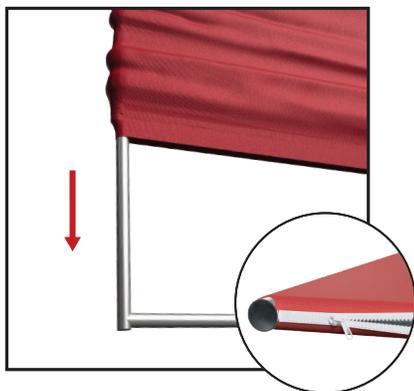


② Feed the fabric from the top of the frame, only a few feet at a time. Close the zipper.

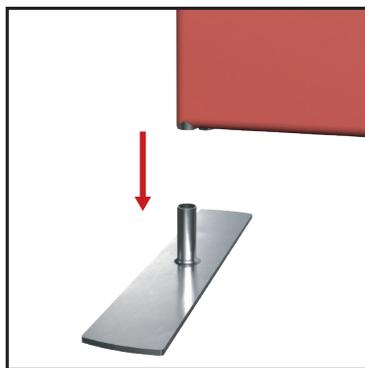

③ Set up the feet in the position that you want to erect the stand, lift the panel(s) and fit on the feet.

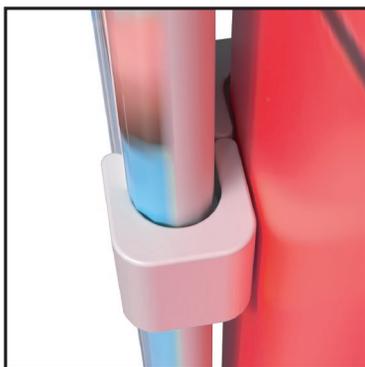

④ To lock the frames together, use the "S" shaped clamp. If you have a header in the kit you can fix to the top by using the clear plastic clips.

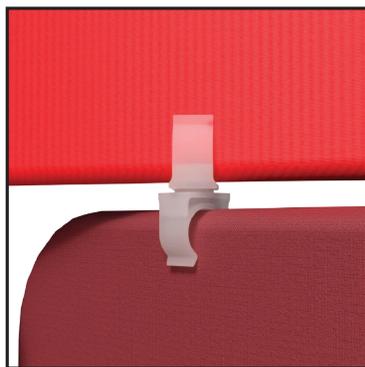

⑤ Attach the header using the clips to the display banner.



⑥ For optional lights, position as desired and clamp into place.